



Laserliner®

ActiveMaster Digital



Digital voltage and continuity tester with bar graph and numerical measured value display

Rev.1114

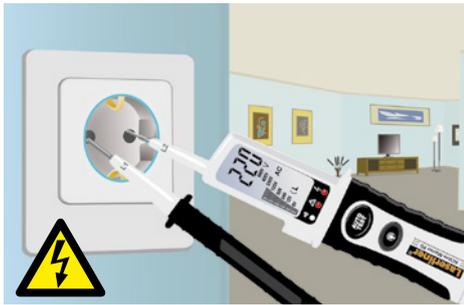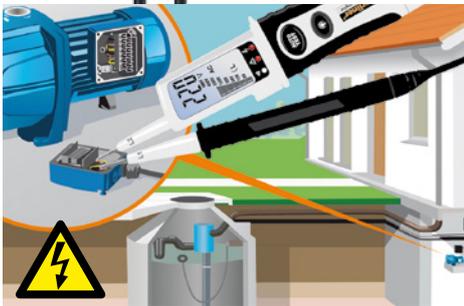

Auto-test function

Large LC display

- **Reliable and fast voltage tester** with the most commonly used nominal voltages
- **Automatic AC voltage and DC voltage test**
- **Automatic range and function changeover** for direct testing and measurement
- **Single-phase and rotary field test** with phase sequence display
- **Single-pole phase testing**
- **Automatic continuity tester** with acoustic signal
- **CAT III - 1000 V** – can be used for measurements throughout building installations
- **Safety self-test** (AC warning) as from 50 V, operates in emergency mode without battery
- **Super-bright LED lighting** for integrated test point illumination
- **Rugged, practical enclosure** with lockable test prod spacing (for standard EU connector)

TECHNICAL DATA

| |
|---|
| LC-DISPLAY / RESOLUTIE 3,5 posities, 1999 digits / 1 V AC/DC (numerical display) |
| VOLTAGE RANGE 6, 12, 24, 50, 120, 230, 400, 690 V AC/DC |
| VOLTAGE DETECTION Automatic |
| PEAK CURRENT (AC/DC) ≤(3mA/2.5mA) |
| FREQUENCY RANGE 50/60 Hz |
| SINGLE-POLE PHASE TEST Voltage range 100...690 V AC (50/60 Hz) |
| CONTINUITY TEST Resistance range < 300 kΩ Test current < 5µA Overvoltage protection 690 V AC/DC |
| ROTARY FIELD DIRECTION INDICATOR Voltage range (LEDs) 100...400 V Frequency range 50/60 Hz |
| OVERVOLTAGE CATEGORY CAT II 1000 V with protective cover: CAT III - 1000 V / CAT IV 600 V |
| TYPE OF PROTECTION IP 64 |
| POWER SUPPLY 2 x 1.5 Type AAA, LR03, alkaline |
| OPERATING TEMPERATURE -10 °C ... 55 °C |
| WEIGHT 230 g |



ActiveMaster Digital
+ batteries (2 x 1.5V AAA)
+ protective covers

Package size (W x H x D)
90 x 315 x 55 mm

| ARTICLE | ARTICLE NO. | EAN CODE | PU |
|----------------------|-------------|-----------------|----|
| ActiveMaster Digital | 083.025A | 4 021563 679836 | 2 |

