

Laserliner

MasterLevel Compact Plus




Digital electronic spirit level
in compact format –
with Bluetooth interface

Rev18W08



- **Reference function** for transferring angles
- **Bluetooth interface** for measurement data transfer
- **FlipDisplay:** the display automatically turns when overhead measurements are involved. So the illuminated display is well readable under all conditions
- **Calibration function** to recalibrate the sensor and increase the measuring accuracy
- **Hold function** to retain the current measured value on the display
- **Optimal use by AutoSound:** The horizontal, vertical and 45° position is displayed together with an acoustic signal – helpful when aligning objects.
- **V-groove,** for holding on pipes
- 360° Angle display
- Illuminated display
- Strong magnets
- Compact format

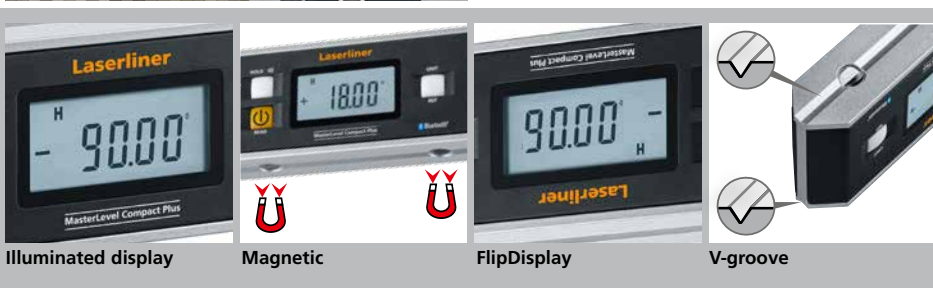

Illuminated display

Magnetic

FlipDisplay

V-groove

TECHNICAL DATA

MEASUREMENT PRECISION

electronic slope
± 0,05° at 0° and 90°
± 0,1° at 1° ... 89°

DISPLAY ACCURACY 2 decimal places

OPERATING CONDITIONS 0 ... 50°C,
85%rH, no condensation,
max. altitude 2000 m

STORAGE CONDITIONS -20 ... 70°C,
85%rH, no condensation

RADIO MODULE OPERATING DATA
Bluetooth LE 4.x interface; Frequency band:
ISM band 2400–2483.5 MHz, 40 channels;
Transmission power: max. 10 mW;
Bandwidth: 2 MHz; Bit rate: 1 Mbit/s;
Modulation: GFSK/FHSS

POWER SUPPLY
2 x 1,5V (Typ AAA/LR03)

WEIGHT with battery
290 g

DIMENSIONS (W x H x D)
152 x 60 x 30 mm



MasterLevel Compact Plus
inclusive carrying case
+ batteries

Packing dimension (W x H x D)
155 x 265 x 81 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterLevel Compact Plus	081.265A	4 021563 702626	1

