

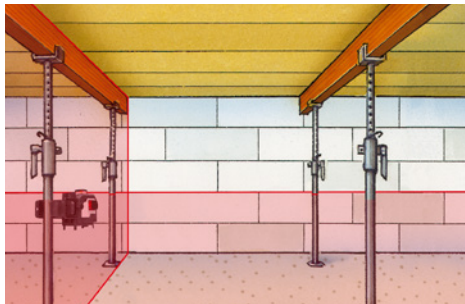


CompactPlane-Laser 3D

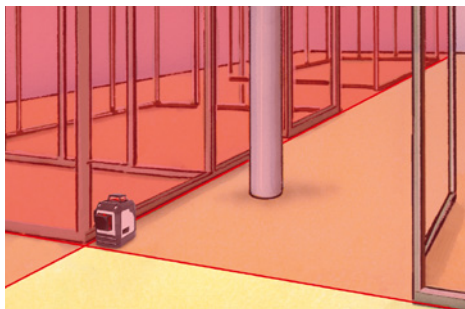

Three-dimensional laser with magnetic clamp and wall bracket

Rev.0216

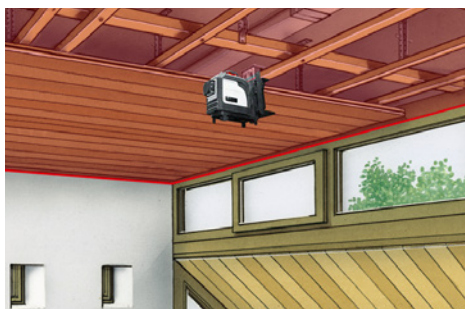


- **PowerBright laser** with **3 bright 360 degree laser lines**
- Straight forward plumb function using laser crosses
- With the **magnetic clamp and wall bracket** the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on **drywall construction profiles**.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- Optimised for **work close to the ceiling**
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport lock:** A pendulum lock protects unit during transport.

TECHNICAL DATA

ACCURACY	3,5 mm / 10 m
SELF-LEVELLING RANGE	± 3,5°
OPERATING RANGE (depending on room illumination)	15 m
LASER WAVELENGTH	650 nm
LASER	line lasers, class 2 < 1 mW
POWER SUPPLY	4 x 1,5V (type AA, LR6)
OPERATING TIME	with 3 laser levels: approx. 6 hours with 2 laser levels: approx. 10 hours with 1 laser level: approx. 25 hours
WORKING TEMPERATURE	0°C ... +50°C
STORAGE TEMPERATURE	-10°C ... +70°C
WATER AND DUST PROTECTION	IP 54
WEIGHT	CPL 3D incl. batteries 670 g (without wall bracket)
DIMENSIONS	CPL 3D 85 x 122 x 132 mm (W x H x D)

1H360° 2V360°



CompactPlane-Laser 3D

including carrying case
+ clamp and wall bracket
+ batteries

Packing dimension (W x H x D)
340 x 275 x 123 mm



Stand-alone device or in combination: clamp and wall bracket

Height and position of the measuring device easily adjustable

For mounting horizontally and vertically

ARTICLE	ARTICLE NO	EAN-CODE	PU
CompactPlane-Laser 3D	036.290A	4 021563 695508	1

