



**INSTITUTO DE CIENCIAS  
DE LA CONSTRUCCIÓN  
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)  
Tel.: (34) 91 302 04 40  
[direccion.ietcc@csic.es](mailto:direccion.ietcc@csic.es) <https://dit.ietcc.csic.es>

## European Technical Assessment

## ETA 14/0374 of 21/02/2022

English translation prepared by IETcc. Original version in Spanish language

### General Part

**Technical Assessment Body issuing the ETA designated according to Art. 29 of Regulation (EU) 305/2011**

Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc)

**Trade name of the construction product**

**Anchor [REDACTED] Stud concrete screw**

**Product family to which the construction product belongs**

Concrete screw of sizes 7.5, 10.5, 12.5, 14.2 and 16.5 for use in cracked and non-cracked concrete.

**Manufacturer**

A notice from Innopro Ltd. The OEM manufacturer's info was deleted for commercial reasons. Please contact our office for the original: [info@innopro.co.il](mailto:info@innopro.co.il)

**Manufacturing plants**

A notice from Innopro Ltd. The OEM manufacturer's info was deleted for commercial reasons. Please contact our office for the original: [info@innopro.co.il](mailto:info@innopro.co.il)

**This European Technical Assessment contains**

22 pages including 4 annexes which form an integral part of this assessment.

**This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of**

European Technical Assessment EAD 330232-01-0601 "Mechanical Fasteners for use in concrete", ed. December 2019

**This ETA replaces**

ETA 14/0374 version 2 issued on 08/03/2019

*English translation prepared by IETcc*

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

English translation prepared by IETcc

## SPECIFIC PART

### 1. Technical description of the product

The Sissy Stud concrete screw is an anchor made of carbon steel. The anchor is made in sizes 7.5, 10.5, 12.5, 14.2 and 16.5, and is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product and its installation description are shown in annexes A.

### 2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means to choosing the right products in relation to the expected economically reasonable working life of the works.

### 3. Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Static or quasi static actions	See annexes C1 to C5
Essential characteristic and displacements for seismic performance categories C1 and C2	See annexes C6 and C7

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfies requirements for class A1
Resistance to fire	See annex D

### 4. Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V of Regulation (EU) No 305/2011) is 96/582/EC.

The system to be applied is 1.

English translation prepared by IETcc

**5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.**

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.



Instituto de Ciencias de la Construcción Eduardo Torroja  
CONSEJO SUPERIOR DE INVESTIGACIONES CIENTÍFICAS

C/ Serrano Galvache n.º 4. 28033 Madrid.

Tel: (+34) 91 302 04 40

<https://dit.ietcc.csic.es>



On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja  
Madrid, 21<sup>st</sup> of February 2022


Firmado por CASTILLO TALAVEIRA  
ANGEL - DNI 52507605P  
Fecha: 22/02/2022 07:34:57 CET



Director IETcc-CSIC

English translation prepared by IETcc

**Product and identification**

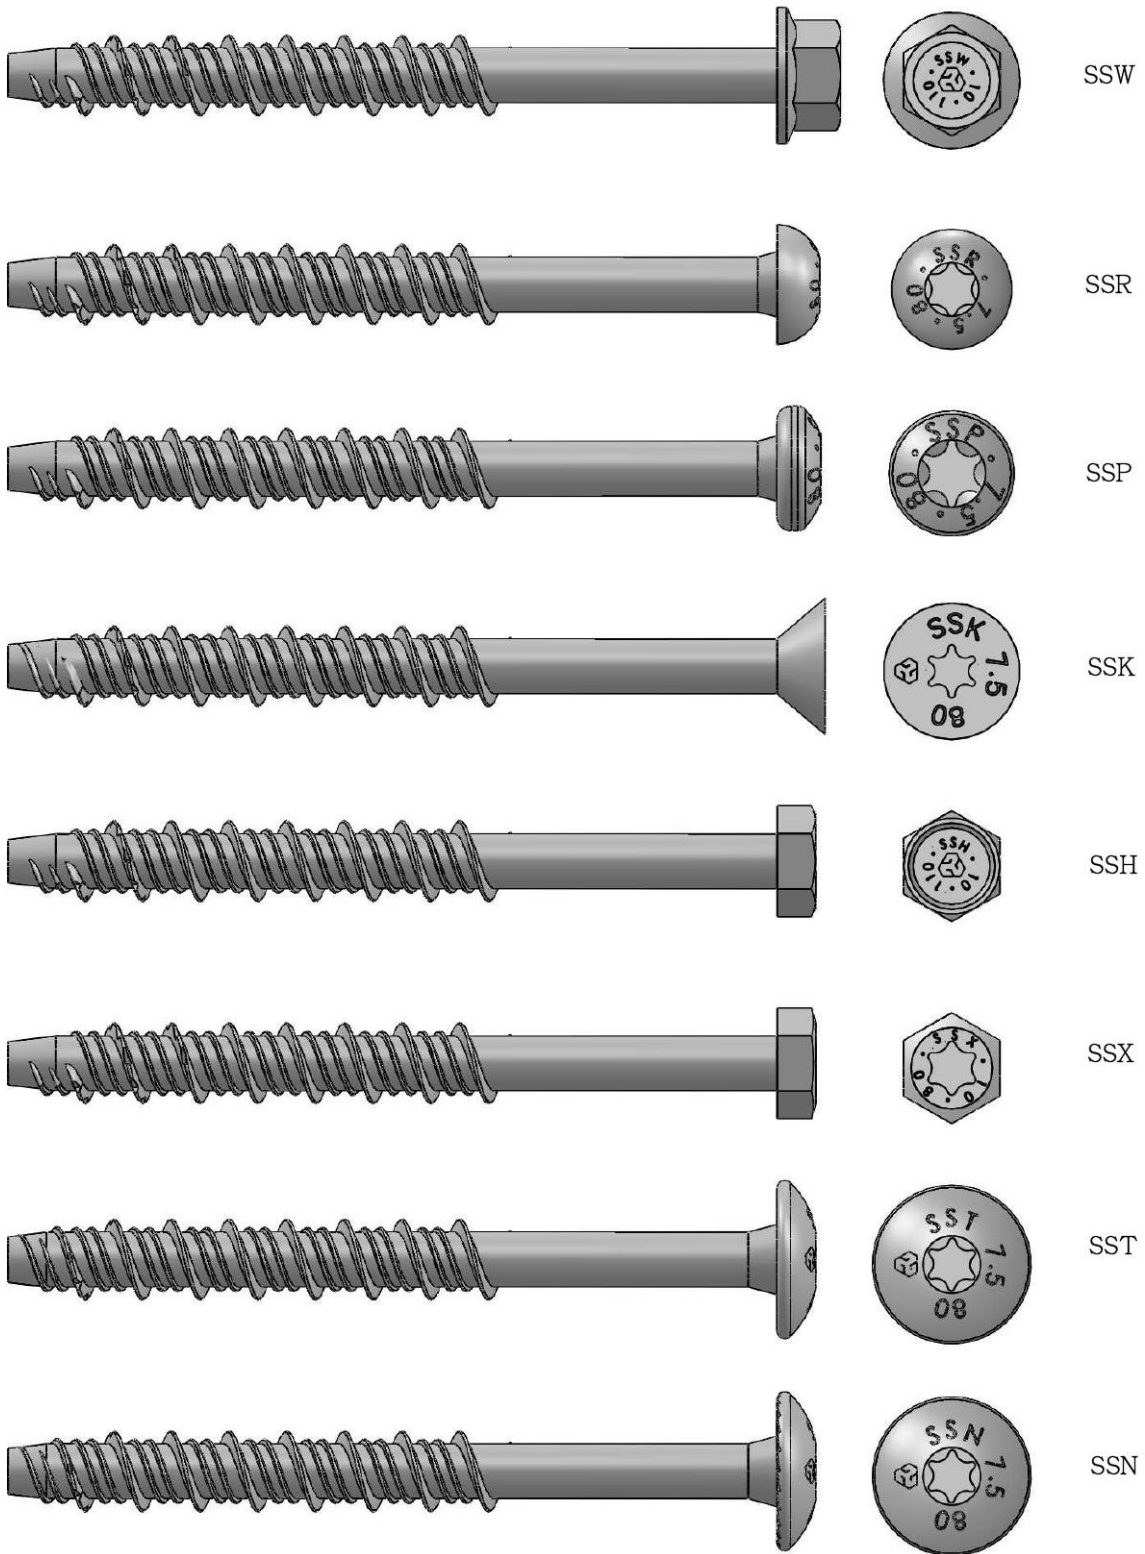





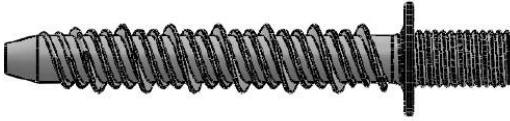

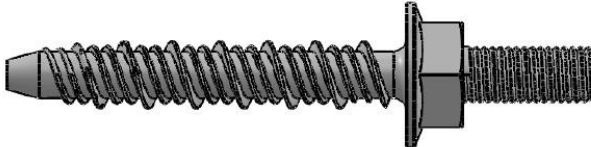



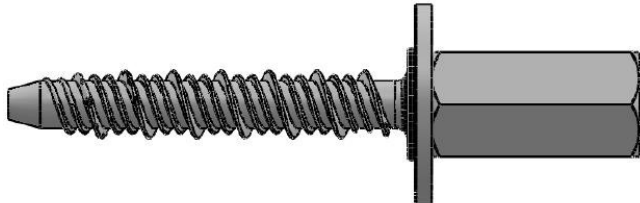

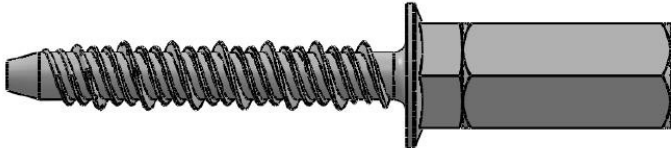

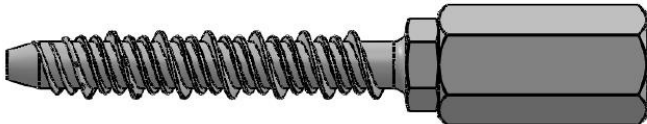

**Sissy Stud concrete screw**

**Product description**

Identification


**Annex A1**

English translation prepared by IETcc

		SSD
		SSI
		SSF
		SSO
		SSU
		SSG
		SSQ
		SSV

<b>Sissy Stud concrete screw</b>	<b>Annex A2</b>
<b>Product description</b>	
Identification	

English translation prepared by IETcc

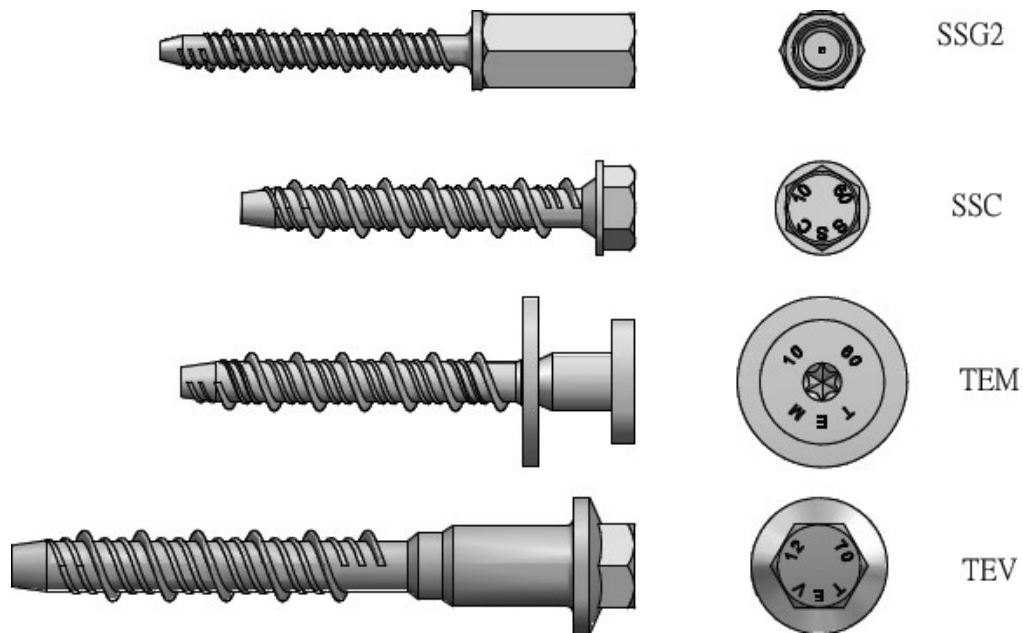

Marking/Identification on anchor:

- Company logo
- Outer diameter
- Length
- Anchor type:
  - Hex head with washer SSW
  - Round head SSR
  - Pan head SSP
  - Countersunk head SSK
  - Hex head SSH
  - Hex head, hexalobular recess SSX
  - Truss head SST
  - Truss head with underhead ribs SSN
  - Connection thread with hexagon drive SSD
  - Internal thread SSI
  - Flat washer head with connection thread SSF
  - Hex washer head with connection thread SSO
  - Hex head with connection thread SSU
  - SSF flex with coupler nut SSG
  - SSO flex with coupler nut SSQ
  - SSU flex with coupler nut SSV
  - SSG flex without washer SSG2
  - Hexagon head with bevelled shoulder SSC
  - Special head with TEM style TEM
  - Special head with TEV style TEV

<b>Sissy Stud concrete screw</b>	<b>Annex A3</b>
<b>Product description</b>	
Identification	

English translation prepared by IETcc

**Table A1: Materials**

Item	Designation	Sissy Stud concrete screw
1	Anchor Body	Carbon steel wire rod cold forged. Allowed coatings: <ul style="list-style-type: none"><li>• Zinc plated ISO 4042</li><li>• Silver ruspert</li><li>• Zinc flake EN 10683</li><li>• Mechanical plated.</li></ul>


<b>Sissy Stud concrete screw</b>	<b>Annex A4</b>
<b>Product description</b>	
Identification	



English translation prepared by IETcc

### **Installed condition**


- $h_{ef}$ : Effective anchorage depth
- $h_1$ : Depth of drilled hole
- $h_{nom}$ : Overall anchor embedment depth in the concrete
- $h_{min}$ : Minimum thickness of concrete member
- $t_{fix}$ : Thickness of fixture
- $d_0$ : Nominal diameter of drill bit
- $d_f$ : Diameter of clearance hole in fixture

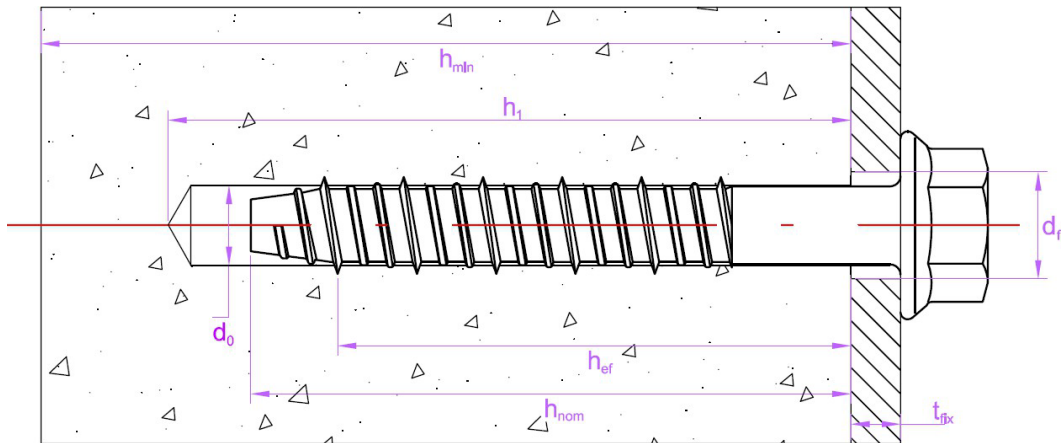


**Drawing A1.** Installed condition for anchors SSW, SSR, SSP, SSK, SSH, SSX, SST, SSN and SSC.

<b>Sissy Stud concrete screw</b>	<b>Annex A5</b>
<b>Product description</b>	
Installed condition	

English translation prepared by IETcc

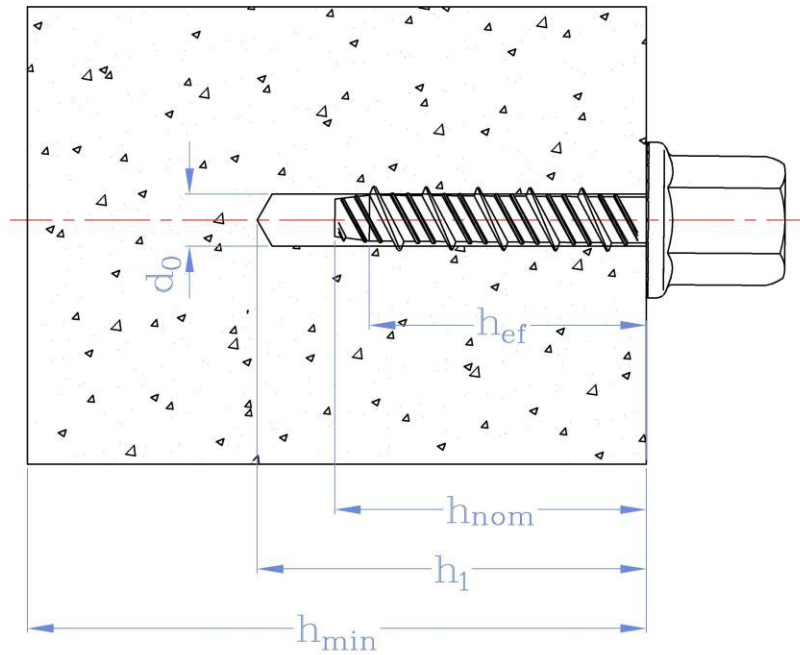

**Drawing A2.** Installed condition for anchors SSD, SSI, SSF, SSO, SSU, SSG, SSQ, SSV, SSG2, TEM and TEV.

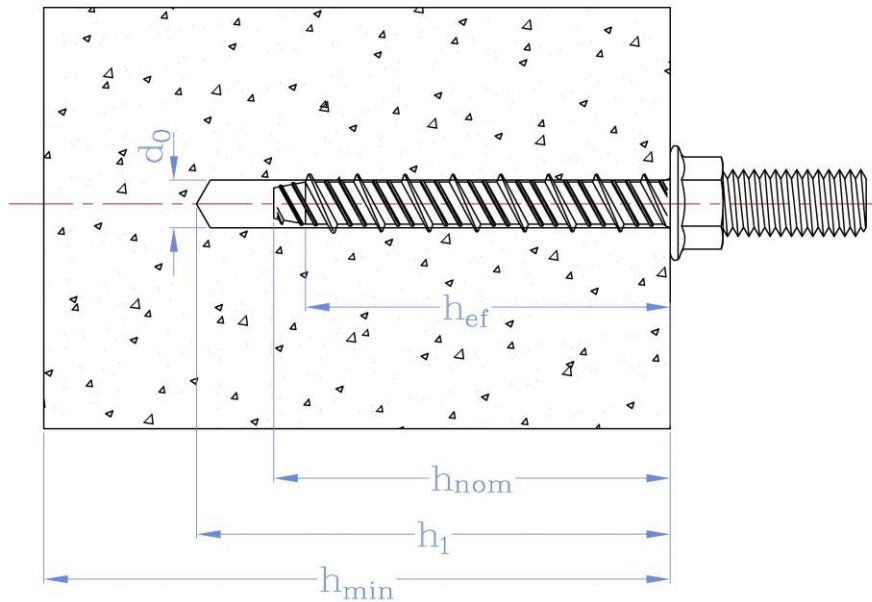

**Drawing A3.** Installed condition for anchors SSD, SSI, SSF, SSO, SSU, SSG, SSQ, SSV, SSG2, TEM and TEV.

<p><b>Sissy Stud concrete screw</b></p>	
<p><b>Product description</b>                  Installed condition</p>	<p><b>Annex A6</b></p>

**Intended use**

**Anchorage subjected to:**

- Static or quasi static loads: all sizes and embedment depths.
- Seismic actions for performances C1 and C2 as per table below

Size	7.5		10.5		12.5		14.2		16.5		
$h_{nom}$	40	55	50	60	60	70	85	75	105	75	110
C1				✓			✓				✓
C2							✓				✓

**Base materials:**

- Reinforced and unreinforced normal weight concrete without fibers according to EN 206:2013 + A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016.
- Cracked and uncracked concrete.

**Use conditions (environmental conditions):**

- The anchor shall be used in dry internal conditions.
- The anchor may be used for anchorages with requirements related to resistance to fire.

**Design:**

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be attached. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static loads are designed for design Method A in accordance with EN 1992-4:2018
- Anchorages under seismic actions are designed in accordance with EN 1992-4:2018. Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure. Fastening in stand-off installation or with grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with EN 1992-4:2018. It must be ensured that local spalling of the concrete cover does not occur.
- Shear assessment only covers the shear force induced by the fixed piece, i.e. the piece located between the anchor head and the concrete block (piece contained in  $t_{fix}$ , see Drawing A1).

**Installation:**

- Hammer drilling only.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the anchor is not possible. The head of the anchor is supported on the fixture, as it is shown in Drawing A1, and it must not be damaged.

**Sissy Stud concrete screw**

**Intended use**

Specifications

**Annex B1**

English translation prepared by IETcc

**Table B1: Installation parameters**

Installation parameters			Performance						
			SS 7.5		SS 10.5		SS 12.5		
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	40	55	50	60	60	70	85
$d_0$	Nominal diameter of drill bit:	[mm]	6		8		10		
$d_f$	Diameter of clearance hole in fixture:	[mm]	9		12		14		
$d_s$	Outer diameter of the thread	[mm]	7.5		10.5		12.5		
$h_{min}$	Minimum thickness of concrete member:	[mm]	100	100	100	100	100	105	130
$h_1$	Depth of drilled hole:	[mm]	50	65	60	70	70	85	100
$h_{ef}$	Effective anchorage depth:	[mm]	29	42	37	45	44	52	65
$T_{ins}$	Installation torque	[Nm]	15		25		50		
$t_{fix}$	Thickness of fixture	[mm]	L-40	L-55	L-50	L-60	L-60	L-70	L-85
$s_{min}$	Minimum allowable spacing:	[mm]	35	45	35	50	50	60	70
$c_{min}$	Minimum allowable edge distance:	[mm]	35	45	35	50	40	60	60

Installation parameters			Performance			
			SS 14.2		SS 16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	75	105	75	110
$d_0$	Nominal diameter of drill bit:	[mm]	12		14	
$d_f$	Diameter of clearance hole in fixture:	[mm]	16		18	
$d_s$	Outer diameter of the thread	[mm]	14.2		16.5	
$h_{min}$	Minimum thickness of concrete member:	[mm]	120	170	120	175
$h_1$	Depth of drilled hole:	[mm]	90	120	90	130
$h_{ef}$	Effective anchorage depth:	[mm]	57	82	56	86
$T_{ins}$	Installation torque	[Nm]	60		80	
$t_{fix}$	Thickness of fixture	[mm]	L-75	L-105	L-75	L-110
$s_{min}$	Minimum allowable spacing:	[mm]	70	70	75	100
$c_{min}$	Minimum allowable edge distance:	[mm]	45	45	45	100


**Sissy Stud concrete screw**

**Performances**

Installation parameters and installation procedure

**Annex B2**

English translation prepared by IETcc

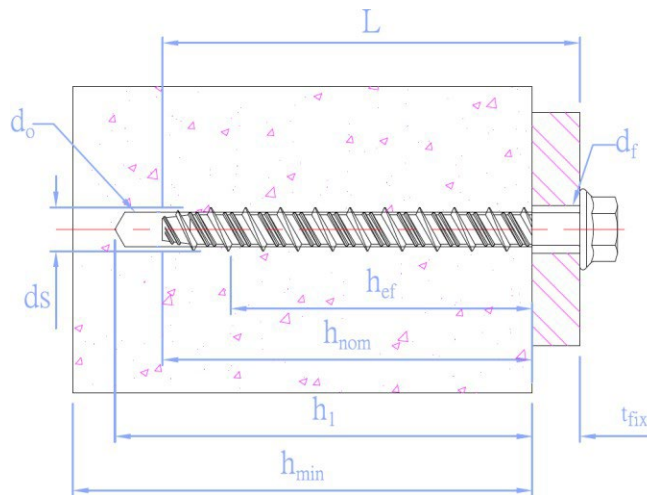

**Drawing B1.** Installed condition for anchors SSW, SSR, SSP, SSK, SSH, SSX, SST, SSN and SSC.

**Installation process**

	<p><b>1. DRILL</b> Drill a hole into the base material of correct diameter and depth by using a carbide drill bit in rotary plus hammer mode.</p>
	<p><b>2. BLOW and CLEAN</b> Remove dust and debris from hole and loose particles left from drilling by using hand pump, compressed air or vacuum.</p>
	<p><b>3. INSTALL</b> Hold screw anchor perpendicular direction into the base material through fixtures.</p>
	<p><b>4. APPLIE TORQUE</b> Select a power impact wrench or a torque wrench (e.g: Bosch GDS 18E, power input: 500 W; torque: 50-250 Nm). Power impact wrench does not exceed over torque <math>T_{inst}</math>.</p>
	<p><b>5. CHECK</b> The head must be undamaged and in contact with the fixture. When screw head attach fixture or concrete surface firmly, further turning of the head is unnecessary.</p>

**Sissy Stud concrete screw**

**Performances**

Installation parameters and installation procedure

**Annex B3**

English translation prepared by IETcc

**Table C1: Characteristic values to tension loads of design method A**

Characteristic values of resistance to tension loads of design method A			Performance						
			SS 7.5		SS 10.5		SS 12.5		
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	40	55	50	60	60	70	85
<b>Tension loads: steel failure</b>									
$N_{Rk,s}$	Tension steel characteristic resistance:	[kN]	18.7		32.7		51.2		
$\gamma_{Ms}$	Partial safety factor: <sup>1)</sup>	[-]	1.5		1.5		1.5		
<b>Tension loads: pull-out failure in concrete</b>									
$N_{Rk,p,ucr}$	Tension characteristic resistance in C20/25 uncracked concrete:	[kN]	6.0	9.0	<sup>2)</sup>	12.0	<sup>2)</sup>	20	<sup>2)</sup>
$\psi_{c,ucr}$	C30/37	[-]	1.16	1.22	1.16	1.08	1.15	1.04	1.09
$\psi_{c,ucr}$	C40/45	[-]	1.28	1.41	1.28	1.15	1.27	1.07	1.15
$\psi_{c,ucr}$	C50/60	[-]	1.39	1.55	1.39	1.19	1.37	1.09	1.21
$N_{Rk,p,cr}$	Tension characteristic resistance in C20/25 cracked concrete:	[kN]	3.0	6.0	6.5	9.0	<sup>2)</sup>	12	<sup>2)</sup>
$\psi_{c,cr}$	C30/37	[-]	1.17	1.22	1.16	1.22	1.14	1.22	1.18
$\psi_{c,cr}$	C40/45	[-]	1.30	1.41	1.29	1.41	1.25	1.41	1.33
$\psi_{c,cr}$	C50/60	[-]	1.42	1.55	1.40	1.55	1.34	1.55	1.46
<b>Tension loads: concrete cone and splitting failure</b>									
$\gamma_{ins}$	Installation safety factor: <sup>1)</sup>	[-]	1.2	1.2	1.2	1.2	1.2	1.2	1.0
$h_{ef}$	Effective embedment depth:	[mm]	29	42	37	45	44	52	65
$k_{ucr,N}$	Factor for uncracked concrete:	[-]	11.0						
$k_{cr,N}$	Factor for cracked concrete:	[-]	7.7						
$s_{cr,N}$	Critical spacing:	[mm]	3.0 x $h_{ef}$						
$c_{cr,N}$	Critical edge distance:	[mm]	1.5 x $h_{ef}$						
$s_{cr,sp}$	Critical spacing (splitting):	[mm]	3.0 x $h_{ef}$						
$c_{cr,sp}$	Critical edge distance (splitting):	[mm]	1.5 x $h_{ef}$						

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Pull-out failure is not decisive

**Sissy Stud concrete screw**

**Performances**

Characteristic values for tension loads

**Annex C1**

English translation prepared by IETcc

Characteristic values of resistance to tension loads of design method A			Performance			
			SS 14.2		SS 16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	75	105	75	110
<b>Tension loads: steel failure</b>						
$N_{Rk,s}$	Tension steel characteristic resistance:	[kN]	80.6		115.9	
$\gamma_{Ms}$	Partial safety factor: <sup>1)</sup>	[-]	1.5		1.5	
<b>Tension loads: pull-out failure in concrete</b>						
$N_{Rk,p,ucr}$	Tension characteristic resistance in C20/25 uncracked concrete:	[kN]	<sup>2)</sup>	<sup>2)</sup>	<sup>2)</sup>	40
$\psi_{c,ucr}$	C30/37	[-]	1.10	1.09	1.13	1.04
$\psi_{c,ucr}$	C40/45	[-]	1.17	1.16	1.24	1.07
$\psi_{c,ucr}$	C50/60	[-]	1.23	1.21	1.33	1.09
$N_{Rk,p,cr}$	Tension characteristic resistance in C20/25 cracked concrete:	[kN]	<sup>2)</sup>	<sup>2)</sup>	<sup>2)</sup>	30
$\psi_{c,cr}$	C30/37	[-]	1.11	1.08	1.14	1.12
$\psi_{c,cr}$	C40/45	[-]	1.19	1.15	1.26	1.23
$\psi_{c,cr}$	C50/60	[-]	1.26	1.20	1.35	1.30
<b>Tension loads: concrete cone and splitting failure</b>						
$\gamma_{ins}$	Installation safety factor: <sup>1)</sup>	[-]	1.2	1.0	1.2	1.0
$h_{ef}$	Effective embedment depth:	[mm]	57	82	56	86
$k_{ucr,N}$	Factor for uncracked concrete:	[-]	11.0			
$k_{cr,N}$	Factor for cracked concrete:	[-]	7.7			
$s_{cr,N}$	Critical spacing:	[mm]	3.0 x $h_{ef}$			
$c_{cr,N}$	Critical edge distance:	[mm]	1.5 x $h_{ef}$			
$s_{cr,sp}$	Critical spacing (splitting):	[mm]	3.0 x $h_{ef}$			
$c_{cr,sp}$	Critical edge distance (splitting):	[mm]	1.5 x $h_{ef}$			

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Pull-out failure is not decisive

**Sissy Stud concrete screw**

**Performances**

Characteristic values for tension loads

**Annex C2**

English translation prepared by IETcc

**Table C2: Displacements under tension loads for Sissy Stud concrete screw**

Characteristic values of displacements under tension loads of design method A			Performance						
			SS 7.5		SS 10.5		SS 12.5		
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	40	55	50	60	60	70	85
<b>Displacements under tension loads in uncracked concrete</b>									
N	Service tension load in uncracked concrete C20/25 to C50/60:	[kN]	2.4	3.6	4.4	4.8	5.7	9.5	12.3
$\bar{\delta}_{N0}$	Short term displacement under tension loads:	[mm]	0.06	0.40	0.08	0.40	0.09	0.40	0.12
$\bar{\delta}_{N\infty}$	Long term displacement under tension loads:	[mm]	0.30	1.00	0.35	1.10	0.40	1.40	0.55
<b>Displacements under tension loads in cracked concrete</b>									
N	Service tension load in cracked concrete C20/25 to C50/60:	[kN]	1.2	2.4	2.5	3.6	4.0	5.7	8.6
$\bar{\delta}_{N0}$	Short term displacement under tension loads:	[mm]	0.10	0.60	0.12	0.70	0.15	0.50	0.17
$\bar{\delta}_{N\infty}$	Long term displacement under tension loads:	[mm]	1.10	1.40	1.20	1.20	1.25	1.40	0.55

Characteristic values of displacements under tension loads of design method A			Performance			
			SS 14.2		SS 16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	75	105	75	110
<b>Displacements under tension loads in uncracked concrete</b>						
N	Service tension load in uncracked concrete C20/25 to C50/60:	[kN]	11.3	18.1	8.2	19.0
$\bar{\delta}_{N0}$	Short term displacement under tension loads:	[mm]	0.08	0.10	0.10	0.90
$\bar{\delta}_{N\infty}$	Long term displacement under tension loads:	[mm]	0.40	0.40	0.45	1.40
<b>Displacements under tension loads in cracked concrete</b>						
N	Service tension load in cracked concrete C20/25 to C50/60:	[kN]	7.7	13.3	5.7	11.9
$\bar{\delta}_{N0}$	Short term displacement under tension loads:	[mm]	0.13	0.15	0.20	0.60
$\bar{\delta}_{N\infty}$	Long term displacement under tension loads:	[mm]	1.25	1.35	1.32	1.20

**Sissy Stud concrete screw**

**Performances**

Displacement under tension loads

**Annex C3**



English translation prepared by IETcc

**Table C3: Characteristic values to shear loads of design method A**

Characteristic values of resistance to shear loads			Performance						
			SS 7.5		SS 10.5		SS 12.5		
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	40	55	50	60	60	70	85
<b>Shear loads: steel failure without lever arm</b>									
$V_{Rk,s}$	Shear steel characteristic resistance:	[kN]	9.3	7.5	16.3		25.6		
$k_7$	$k_7$ factor:		0.8		0.8		0.8		
$\gamma_{Ms}$	Partial safety factor: *)	[-]	1.25		1.25		1.25		
<b>Shear loads: steel failure with lever arm</b>									
$M^0_{Rk,s}$	Characteristic bending moment:	[Nm]	15.2		35.3		69.3		
$\gamma_{Ms}$	Partial safety factor: *)	[-]	1.25		1.25		1.25		
<b>Shear loads: concrete pryout failure</b>									
$k_8$	$k_8$ factor:	[-]	0.8	1.0	1.2	1.0	1.0	1.0	1.0
$\gamma_{inst}$	Installation safety factor: *)	[-]	1.0	1.5	1.0	1.5	1.0	1.5	1.0
<b>Shear loads: concrete edge failure</b>									
$l_f$	Effective anchorage depth under shear loads:	[mm]	29	42	37	45	44	52	65
$d_{nom}$	Nominal outer diameter of screw:	[mm]	6	6	8	8	10	10	10
$\gamma_{inst}$	Installation safety factor: *)	[-]	1.2	1.5	1.2	1.5	1.2	1.5	1.0

\*) In absence of other national regulations

Characteristic values of resistance to shear loads			Performance			
			SS 14.2		SS 16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	75	105	75	110
<b>Shear loads: steel failure without lever arm</b>						
$V_{Rk,s}$	Shear steel characteristic resistance:	[kN]	40.3		57.9	
$k_7$	$k_7$ factor:		0.8		0.8	
$\gamma_{Ms}$	Partial safety factor: *)	[-]	1.25		1.25	
<b>Shear loads: steel failure with lever arm</b>						
$M^0_{Rk,s}$	Characteristic bending moment:	[Nm]	137.1		235.9	
$\gamma_{Ms}$	Partial safety factor: *)	[-]	1.25		1.25	
<b>Shear loads: concrete pryout failure</b>						
$k_8$	$k_8$ factor:	[-]	1.5		1.6	2.0
$\gamma_{inst}$	Installation safety factor: *)	[-]	1.25		1.0	1.5
<b>Shear loads: concrete edge failure</b>						
$l_f$	Effective anchorage depth under shear loads:	[mm]	57	82	56	86
$d_{nom}$	Nominal outer diameter of screw:	[mm]	12	12	14	14
$\gamma_{inst}$	Installation safety factor: *)	[-]	1.2	1.0	1.2	1.5

\*) In absence of other national regulations

<b>9Sissy Stud concrete screw</b>	<b>Annex C4</b>
<b>Performances</b>	
Characteristic values for shear loads	

English translation prepared by IETcc

**Table C4: Displacements under shear loads**

Characteristic values of displacements under shear loads of design method A			Performances						
			SS 7.5		SS 10.5		SS 12.5		
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	40	55	50	60	60	70	85
<b>Displacements under shear loads in uncracked concrete</b>									
V	Service shear load in cracked and uncracked concrete C20/25 to C50/60:	[kN]	3.0	3.6	4.4	4.8	5.7	9.5	12.3
$\delta_{v0}$	Short term displacement under shear loads:	[mm]	0.47	0.4	0.50	0.40	0.40	0.40	0.80
$\delta_{v\infty}$	Long term displacement under shear loads:	[mm]	0.70	1.0	0.75	1.10	0.60	1.40	1.20
<b>Displacements under shear loads in cracked concrete</b>									
V	Service shear load in cracked and uncracked concrete C20/25 to C50/60:	[kN]	2.1	2.4	3.1	3.6	4.0	5.7	8.6
$\delta_{v0}$	Short term displacement under shear loads:	[mm]	0.40	0.60	0.45	0.70	0.50	0.50	0.6
$\delta_{v\infty}$	Long term displacement under shear loads:	[mm]	0.60	1.40	0.67	1.20	0.75	1.40	0.90

Characteristic values of displacements under shear loads of design method A			Performances			
			SS 14.2		SS 16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	75	105	75	110
<b>Displacements under shear loads in uncracked concrete</b>						
V	Service shear load in cracked and uncracked concrete C20/25 to C50/60:	[kN]	8.4	17.4	8.2	19.0
$\delta_{v0}$	Short term displacement under shear loads:	[mm]	1.00	1.10	0.55	0.90
$\delta_{v\infty}$	Long term displacement under shear loads:	[mm]	1.50	1.80	0.82	1.4
<b>Displacements under shear loads in cracked concrete</b>						
V	Service shear load in cracked and uncracked concrete C20/25 to C50/60:	[kN]	5.9	12.2	5.7	11.9
$\delta_{v0}$	Short term displacement under shear loads:	[mm]	0.85	1.00	0.50	0.60
$\delta_{v\infty}$	Long term displacement under shear loads:	[mm]	1.20	1.50	0.75	1.20

**Information for design of anchorages under shear loads:**

The conditions given in EN 1992-4:2018 are not fulfilled because the diameter of the clearance hole in the fixture (see "Installation parameters" table B1) is greater than the values given in EN 1992-4 Table 6.1 for the corresponding diameter of the anchor. Therefore, condition EN 1992-4 6.2.2.2(1) a) 2) is not valid for shear steel failure for anchors groups ( $n > 1$ ). Consequently, it is assumed that for the proof of steel failure, only two anchors of a group are effective and take up shear forces."

**Sissy Stud concrete screw**

**Performances**

Displacements under shear loads

**Annex C5**

English translation prepared by IETcc

**Table C5: Essential characteristics for seismic performance category C1**

Essential characteristics for seismic performance category C1			Performances			
			10.5	12.5	16.5	
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	60	85	110	
<b>Steel failure for tension and shear loads</b>						
$N_{Rk,s,C1}$	Characteristic resistance:	[kN]	32.7	51.2	115.9	
$\gamma_{Ms}$	Partial safety factor <sup>1)</sup> :	[-]	1.5	1.5	1.5	
$V_{Rk,s,C1}$	Characteristic resistance:	[kN]	16.3	24.3	57.9	
$\gamma_{Ms}$	Partial safety factor <sup>1)</sup> :	[-]	1.25	1.25	1.25	
<b>Pull out failure</b>						
$N_{Rk,p,C1}$	Characteristic resistance in cracked concrete:	[kN]	9.0	24.0	30.0	
$\gamma_{inst}$	Robustness:	[-]	1.8	1.8	1.5	
<b>Concrete cone failure</b>						
$h_{ef}$	Effective embedment depth:	[mm]	45	65	86	
$S_{cr,N}$	Concrete	Spacing:	[mm]	135	195	258
$C_{cr,N}$	cone failure	Edge distance:	[mm]	67	98	129
$\gamma_{inst}$	Installation safety factor:	[-]	1.2	1.0	1.0	
<b>Concrete pry-out failure</b>						
$k_8$	Pry-out factor:	[-]	1.0	0.9	1.5	
$\gamma_{inst}$	Installation safety factor:	[-]	1.2	1.0	1.0	
<b>Concrete edge failure</b>						
$l_f = h_{ef}$	Effective length of fastener under shear loads:	[mm]	45	65	86	
$d_{nom}$	Nominal outer diameter of screw:	[mm]	8	10	14	
$\gamma_{inst}$	Installation safety factor:	[-]	1.0	1.0	1.0	

<sup>1)</sup> In absence of other national regulations

**Sissy Stud concrete screw**

**Performances**

Essential characteristics for seismic performance category C1

**Annex C6**

English translation prepared by IETcc

**Table C6: Essential characteristics for seismic performance category C2**

Essential characteristics for seismic performance category C2			Performances	
			12.5	16.5
$h_{nom}$	Overall anchor embedment depth in the concrete:	[mm]	85	110
<b>Steel failure for tension and shear loads</b>				
$N_{Rk,s,C2}$	Characteristic resistance:	[kN]	51.2	115.9
$\gamma_{Ms}$	Partial safety factor <sup>1)</sup> :	[-]	1.5	1.5
$V_{Rk,s,C2}$	Characteristic resistance:	[kN]	16.1	41.1
$\gamma_{Ms}$	Partial safety factor <sup>1)</sup> :	[-]	1.25	1.25
<b>Pull out failure</b>				
$N_{Rk,p,C2}$	Characteristic resistance in cracked concrete:	[kN]	11.0	9.6
$\gamma_{inst}$	Robustness:	[-]	1.8	1.5
<b>Concrete cone failure</b>				
$h_{ef}$	Effective embedment depth:	[mm]	65	86
$s_{cr,N}$	Concrete Spacing:	[mm]	195	258
$c_{cr,N}$	cone failure Edge distance:	[mm]	98	129
$\gamma_{inst}$	Installation safety factor:	[-]	1.0	1.0
<b>Concrete pry-out failure</b>				
$k_8$	Pry-out factor:	[-]	0.92	1.5
$\gamma_{inst}$	Installation safety factor:	[-]	1.0	1.0
<b>Concrete edge failure</b>				
$l_f = h_{ef}$	Effective length of fastener under shear loads:	[mm]	65	86
$d_{nom}$	Nominal outer diameter of screw:	[mm]	10.0	14.0
$\gamma_{inst}$	Installation safety factor:	[-]	1.0	1.0
<b>Displacements</b>				
$\bar{O}_{N,C2} (DLS)$	Displacement at	[mm]	0.35	0.73
$\bar{O}_{V,C2} (DLS)$	Damage Limitation State: <sup>2)</sup>	[mm]	5.16	5.67
$\bar{O}_{N,C2} (ULS)$	Displacement at	[mm]	1.11	2.06
$\bar{O}_{V,C2} (ULS)$	Ultimate Limitation State: <sup>2)</sup>	[mm]	7.90	7.90

DLS: Damage Limitation State: see EN 1992-4, 2.2.1)

ULS: Ultimate Limitation State: see EN 1992-4 2.2.1)

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> The listed displacements represent mean values

**Sissy Stud concrete screw**

**Performances**

Essential characteristics for seismic performance category C2

**Annex C7**

English translation prepared by IETcc

**Table D1: Characteristic values to fire resistance**

Fire resistance duration = 30 minutes		SS 7.5	SS 10.5	SS 12.5	SS 16.5
<b>Tension loads, steel failure</b>					
$N_{Rk,s,fi,30}$	Characteristic resistance [kN]	0.23	0.61	1.28	2.90
<b>Pull-out failure</b>					
$N_{Rk,p,fi,30}$	Character. resistance in concrete C20/25 to C50/60 [kN]	1.50	2.25	3.00	7.50
<b>Concrete cone failure **)</b>					
$N_{Rk,c,fi,30}$	Character. resistance in concrete C20/25 to C50/60 [kN]	2.06	2.45	3.51	12.35
<b>Shear loads steel failure without lever arm</b>					
$V_{Rk,s,fi,30}$	Characteristic resistance [kN]	0.23	0.61	1.28	2.90
<b>Shear loads, steel failure with lever arm</b>					
$M_{Rk,s,fi,60}$	Characteristic bending resistance [Nm]	0.19	0.66	1.73	5.90

Fire resistance duration = 60 minutes		SS 7.5	SS 10.5	SS 12.5	SS 16.5
<b>Tension loads, steel failure</b>					
$N_{Rk,s,fi,60}$	Characteristic resistance [kN]	0.21	0.53	0.96	2.17
<b>Pull-out failure</b>					
$N_{Rk,p,fi,60}$	Character. resistance in concrete C20/25 to C50/60 [kN]	1.50	2.25	3.00	7.50
<b>Concrete cone failure **)</b>					
$N_{Rk,c,fi,60}$	Character. resistance in concrete C20/25 to C50/60 [kN]	2.06	2.45	3.51	12.35
<b>Shear loads, steel failure without lever arm</b>					
$V_{Rk,s,fi,60}$	Characteristic resistance [kN]	0.21	0.53	0.96	2.17
<b>Shear loads, steel failure with lever arm</b>					
$M_{Rk,s,fi,60}$	Characteristic bending resistance [Nm]	0.17	0.57	1.30	4.42

Fire resistance duration = 90 minutes		SS 7.5	SS 10.5	SS 12.5	SS 16.5
<b>Tension loads, steel failure</b>					
$N_{Rk,s,fi,90}$	Characteristic resistance [kN]	0.16	0.41	0.83	1.88
<b>Pull-out failure</b>					
$N_{Rk,p,fi,90}$	Character. resistance in concrete C20/25 to C50/60 [kN]	1.50	2.25	3.00	7.50
<b>Concrete cone failure **)</b>					
$N_{Rk,c,fi,90}$	Character. resistance in concrete C20/25 to C50/60 [kN]	2.06	2.45	3.51	12.35
<b>Shear loads, steel failure without lever arm</b>					
$V_{Rk,s,fi,90}$	Characteristic resistance [kN]	0.16	0.41	0.83	1.88
<b>Shear loads, steel failure with lever arm</b>					
$M_{Rk,s,fi,90}$	Characteristic bending resistance [Nm]	0.13	0.44	1.13	3.83

**Sissy Stud concrete screw**

**Performances**  
Characteristic values for fire resistance

**Annex D1**

English translation prepared by IETcc

Fire resistance duration = 120 minutes		SS 7.5	SS 10.5	SS 12.5	SS 16.5
<b>Tension loads, steel failure</b>					
$N_{Rk,s,fi,120}$	Characteristic resistance [kN]	0.12	0.33	0.64	1.45
<b>Pull-out failure</b>					
$N_{Rk,p,fi,120}$	Character. resistance in concrete C20/25 to C50/60 [kN]	1,20	1.80	2.40	6.00
<b>Concrete cone failure **)</b>					
$N_{Rk,c,fi,120}$	Character. resistance in concrete C20/25 to C50/60 [kN]	1.65	1.96	2.81	9.88
<b>Shear loads, steel failure without lever arm</b>					
$V_{Rk,s,fi,120}$	Characteristic resistance [kN]	0.12	0.33	0.64	1.45
<b>Shear loads, steel failure with lever arm</b>					
$M_{Rk,s,fi,120}$	Characteristic bending resistance [Nm]	0.10	0.35	0.87	2.95

Spacing and edge distances		SS 7.5	SS 10.5	SS 12.5	SS 16.5
$S_{cr,N}$	Spacing [mm]	168	180	208	344
$S_{min}$	Minimum spacing [mm]	45	50	60	100
$C_{cr,N}$	Edge distance [mm]	84	90	104	172
$C_{min}$	Minimum edge distance (one side fire) [mm]	84	90	104	172
$C_{min}$	Minimum edge distance (two sides fire) [mm]	300	300	300	300
$\gamma_{Msp}$	Partial safety factor <sup>*)</sup> [-]	1.0	1.0	1.0	1.0

\*) In absence of other national regulations

\*\*) As a rule, splitting failure can be neglected when cracked concrete and reinforcement is assumed.

Concrete pry-out failure	SS 7.5	SS 10.5	SS 12.5	SS 16.5
k factor [-]	1	1	1	2

According EN 1992-4:2018, these values of k factor and the relevant values of  $N_{Rk,c,fi}$  given in the above tables have to be considered in the design.

Concrete edge failure
The characteristic resistance $V_{Rk,c,fi}^0$ in C20/25 to C50/60 concrete is determined by: $V_{Rk,c,fi}^0 = 0.25 \times V_{Rk,c}^0 (\leq R90)$ and $V_{Rk,c,fi}^0 = 0.20 \times V_{Rk,c}^0 (R120)$ With $V_{Rk,c}^0$ initial value of the characteristic resistance in cracked concrete C20/25 under normal temperature according to EN 1992-4:2018.

**Sissy Stud concrete screw**

**Performances**

Characteristic values for fire resistance

**Annex D2**