

Laserliner



VarioStand L 300 cm



High-quality aluminium tripod

This high-quality aluminium tripod allows laser measuring instruments with a 1/4" and 5/8" thread to be set up safely and accurately, irrespective of the ground conditions. The crank stroke, the combined tips (rubber/steel) and the telescopic tripod legs provide accurate adjustment.

- Exact and reliable installation of laser measuring instruments
- Easily adaptable to the ground surface thanks to combined rubber and steel tips
- Crank height adjustment and telescopic tripod legs
- With adapter for mounting devices with 1/4" and 5/8" thread

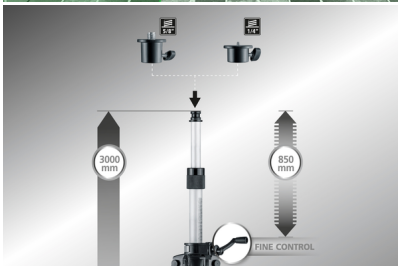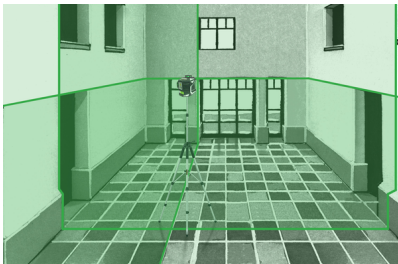

TECHNICAL SPECIFICATIONS

MATERIAL	aluminum
MAX. LOAD CAPACITY	6 kg
MAX. HEIGHT	3100 mm
MIN. HEIGHT	980 mm
TRIPOD CONNECTION	1/4" / 5/8" thread
OPERATING CONDITIONS	-20°C ... 60°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	140 mm x 1000 mm x 140 mm x (without accessories)
WEIGHT	4300 g (without accessories)

