
Laserliner


DampFinder Compact



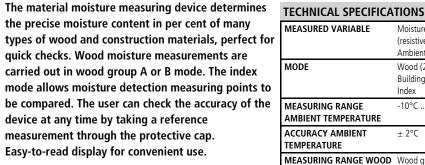

- Fast and precise measurement of wood and building moisture
- Can be used to test many types of wood
- Index function for optimum evaluation of various material categories
- Effective testing of the measuring instrument using reference measurement through the protective cap
- Practical display of current ambient temperature when switching on
- · Easy-to-read display

TECHNICAL SPECIFICATIONS	
MEASURED VARIABLE	Moisture content of material (resistive) Ambient temperature
MODE	Wood (2 groups) Building materials (8 materials) Index
MEASURING RANGE AMBIENT TEMPERATURE	-10°C 50°C
ACCURACY AMBIENT TEMPERATURE	± 2°C
MEASURING RANGE WOOD	Wood group A: 5.6% 55.4% Wood group B: 7.3% 63.3%
ACCURACY (ABSOLUTE) WOOD	± 1% (5% 30%) ± 2% (<5% and >30%)
MEASURING RANGE BUILDING MATERIALS	0% 38%
	± 0.15% (0% 10%)
ACCURACY (ABSOLUTE) BUILDING MATERIALS	± 0.13 /0 (0 /0 10 /0)









 DampFinder Compact
 ORDER NO. 082.015A
 EAN-CODE 4021563690015
 PU 1